

1

2

3

4

5

6

7

8

A

B


C

D


E

F


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DWG	WANG	2016-03-12

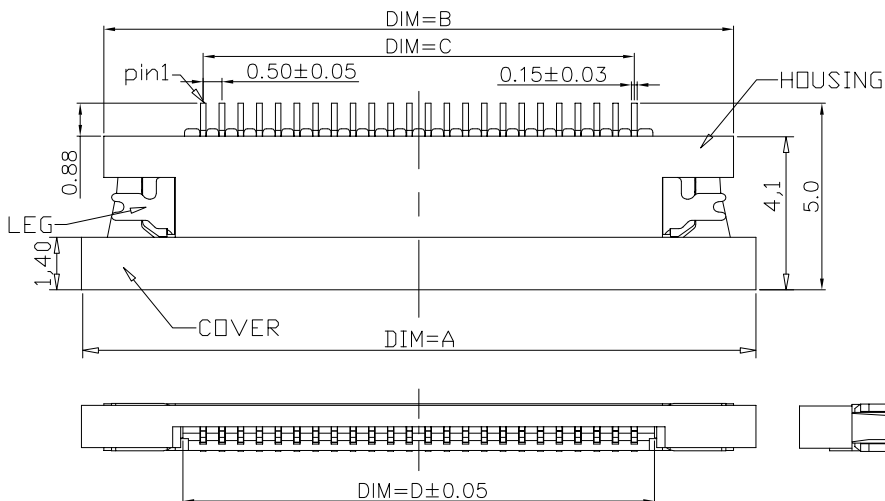

ALL SOLDER AREAS

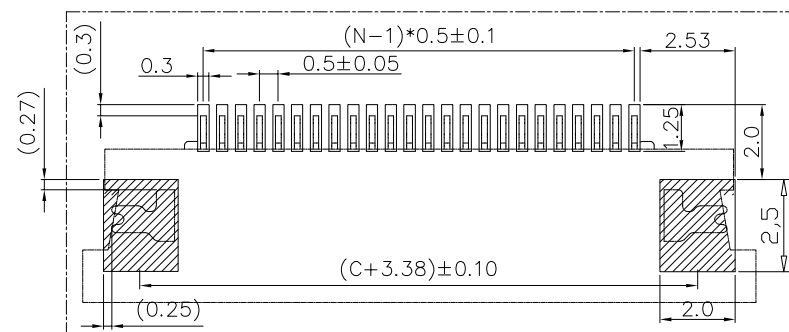

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

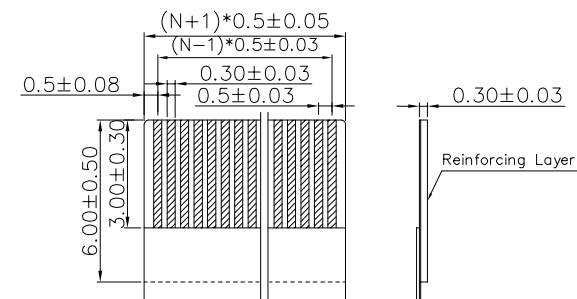

RECOMMENDED FFC
TOLERANCE:±0.05

NOTES:





- MATERIAL:
HOUSING: LCP UL 94V-0, COLOR:NATURE
ACTUATOR: LCP UL 94V-0, COLOR:BLACK
TERMINAL: PHOSPHOR BRONZE
STOPPER: BRASS
- PLATING:
TERMINAL: TIN OVER NICKEL
STOPPER: TIN OVER NICKEL
- PATING:
CURRENT RATING:0.4A (AC/DC)
OPERATING VOLTAGE:50V (AC/DC)
OPERATING TEMPERATURE: -55℃~+85℃



深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27129737 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: FPC 0.5间距1.2高下接抽屜式			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE	PART NO: 产品编号: 0.5K-1.2X-nPWB		
X.XX	±0.20	X.XX°	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG	2016-03-12	1:1	mm
				CODE NUMBER A001			

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DRG	WANG	2016-03-12

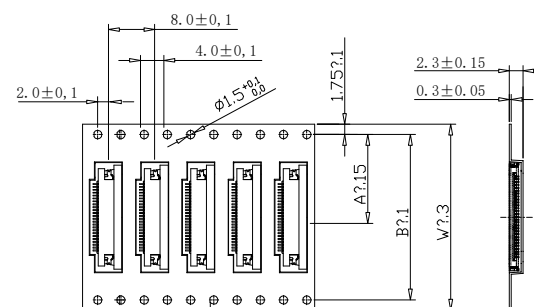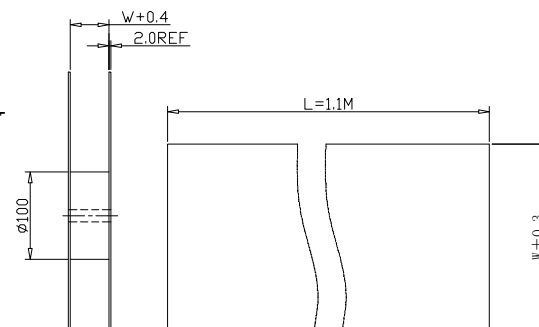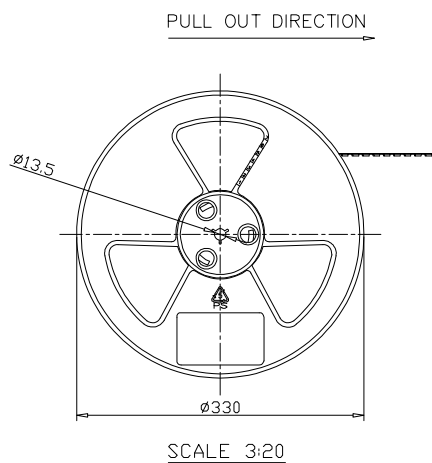

UPPER EPS
(1PCS) (保利龍板) ①

③ DESICCANT(2PCS)
(3G/PCS) (干燥剂)

NUMBER REEL
(盤數)

PE BAG(1PCS) ②
(PE防水袋)

AIR BLADDER BAG ④
(氣泡袋, 每膠盤用1PCS)

RIVET MAST (4PCS) ⑤
(折疊板)

CARTON (1PCS) (紙箱) ⑥

GP LABEL ⑦
(環保標籤) (1PCS)

GP LABEL ⑦
(環保標籤) (1PCS)

DOWN EPS
(1PCS) (下保利龍板) ⑨

NOTES:

- CARTON SPEC.: 350*350*340mm(OUT DIM), PAPER THICKNESS=5mm
- UPPER AND DOWN EPS: 340*340mm THICKNESS=8mm.
- THE COVER TAPE PEELING FORCE: 30~100g.
- PER REEL CASED ONE AIR BLADDER BAG.
- CARRIER TAPE COLIR: BLACK.
- CONNENCE ANG ENDED 200mm(200PCS) DON'T PUT IN PRODUCE.

PIN NO.	W	A	B	AO	BO	PCS /REEL	REEL/CARTON	SUM(PCS)
4PIN~8PIN	16	7.5	—	6.4+ (n-4)*0.5 (n=pin no)	5.5	4000	14	56000
9PIN~24PIN	24	11.5	—		5.5	4000	10	40000
25PIN~36PIN	32	14.2	28.4		5.5	4000	8	32000
37PIN~55PIN	44	20.2	40.4		5.5	4000	6	24000
56PIN~60PIN	56	26.2	52.4		5.5	4000	5	20000



深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

电话: 0755-27129737 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: FPC 0.5间距1.2高下接抽展式			
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE		
X.XX	±0.20	X.XX°	±2°	CHECK: 校对:	WANG		
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG		
				2016-03-12	1:1	mm	A001