


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DRG	WANG	2016-03-12

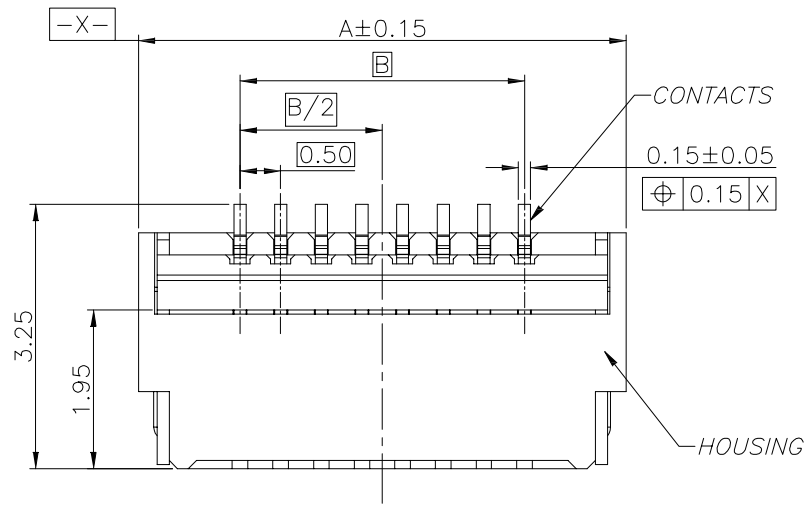

NOTE:

1. MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC(UL94V-0), COLOR: NATURAL.

CONTACTS: COPPER ALLOY.

PEG: COPPER ALLOY.

ACTUATOR: HIGH TEMPERATURE THERMOPLASTIC(UL94-V0).

2. RATING:

OPERATING VOLTAGE: 50Vrms AC.



CURRENT RATING: 0.5A.

OPERATING TEMPERATURE: -55°C~+85°C.

OPERATING HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

STORAGE TEMPERATURE RANGE: -10°C~+50°C.

STORAGE HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

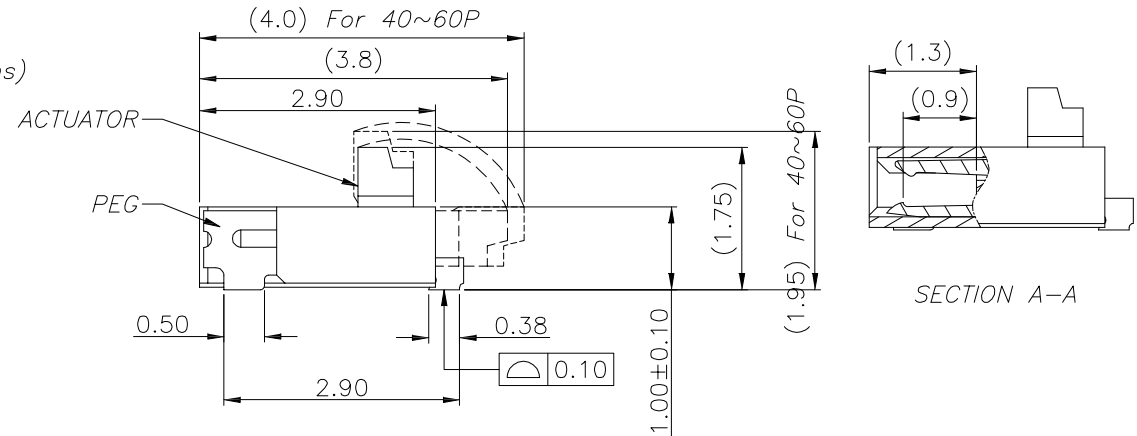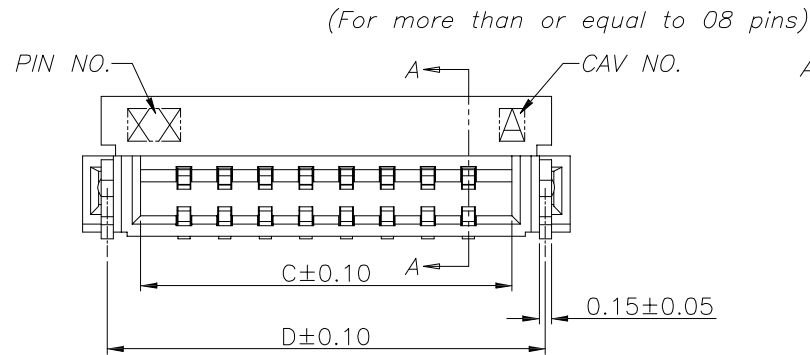


深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

电话: 0755-27129737 传真: 0755-29940187


-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: FPC 0.5间距1.0高前插后掀盖式	
X.X ±0.30	X.X* ±3°	APPD: 核准: XIE	PART NO: 产品编号: 0.5K-HX-4PWB
X.XX ±0.20	X.XX* ±2°	CHECK: 校对: WANG	DATE
X.XXX ±0.10	X.XXX* ±1°	DRAW: 绘图: WANG	SCALE
			UNIT
			CODE NUMBER
		2016-03-12	1:1
			mm
			A001

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
AO		NEW DRG	WANG	2016-03-12

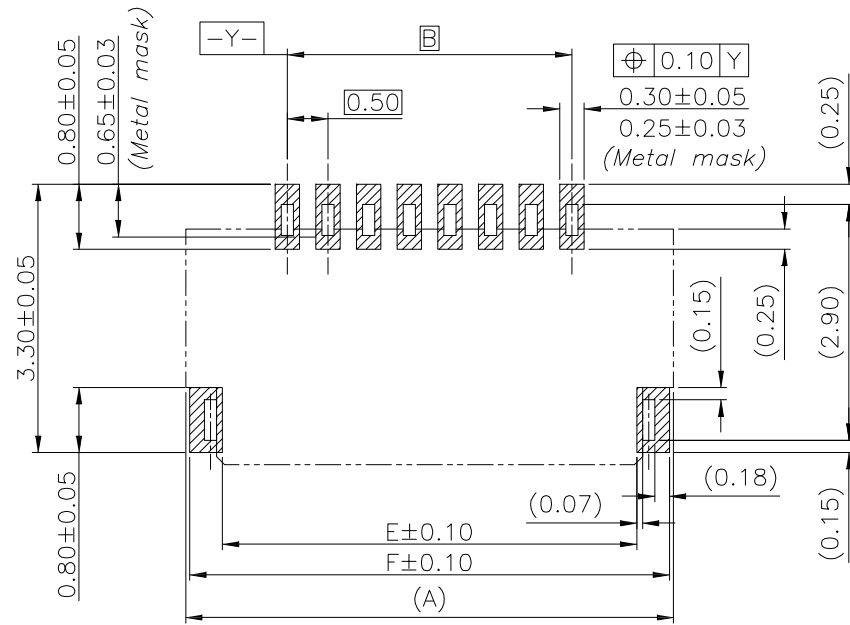

Recommended PCB mounting pattern and metal mask dimensions

Recommended metal mask thickness: $t=0.1$

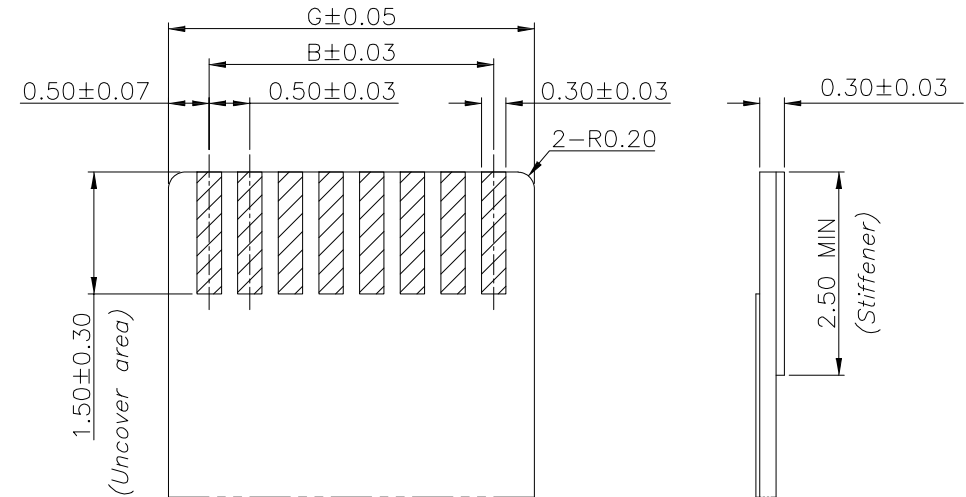

Recommended FPC/FFC Dimensions

50	27.00	24.50	25.57	26.39	26.10	26.90	25.50
45	24.50	22.00	23.07	23.89	23.60	24.40	23.00
40	22.00	19.50	20.57	21.39	21.10	21.90	20.50
34	19.00	16.50	17.57	18.39	18.10	18.90	17.50
32	18.00	15.50	16.57	17.39	17.10	17.90	16.50
30	17.00	14.50	15.57	16.39	16.10	16.90	15.50
26	15.00	12.50	13.57	14.39	14.10	14.90	13.50
24	14.00	11.50	12.57	13.39	13.10	13.90	12.50
23	13.50	11.00	12.07	12.89	12.60	13.40	12.00
22	13.00	10.50	11.57	12.39	12.10	12.90	11.50
20	12.00	9.50	10.57	11.39	11.10	11.90	10.50
16	10.00	7.50	8.57	9.39	9.10	9.90	8.50
14	9.00	6.50	7.57	8.39	8.10	8.90	7.50
12	8.00	5.50	6.57	7.39	7.10	7.90	6.50
11	7.50	5.00	6.07	6.89	6.60	7.40	6.00
10	7.00	4.50	5.57	6.39	6.10	6.90	5.50
8	6.00	3.50	4.57	5.39	5.10	5.90	4.50
7	5.50	3.00	4.07	4.89	4.60	5.40	4.00
6	5.00	2.50	3.57	4.39	4.10	4.90	3.50
4	4.00	1.50	2.57	3.39	3.10	3.90	2.50
ber of Contacts	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G

		深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD 电话: 0755-27129737 传真: 0755-29940187					
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: FPC 0.5间距1.0高前插后掀盖式			
X.X	±0.30	X.X*	±3°	APPD: 核准: XIE	PART NO: 产品编号: 0.5K-HX-4PWB		
X.XX	±0.20	X.XX*	±2°	CHECK: 校对: WANG	DATE	SCALE	UNIT
X.XXX	±0.10	X.XXX*	±1°	DRAW: 绘图: WANG	2016-03-12	1:1	mm
				CODE NUMBER A001			